

ENHANCED BUSINESS LICENCE-FREE TWO-WAY RADIO

BP518LF

COMPACT, LIGHT, ROBUST LICENCE FREE, PMR446



FEATURES TO KEEP YOU CONNECTED



DIGITAL AND ANALOG COMPATIBLE

Supports both digital and analog modes, compatible with other PMR446 analog and DMR Tier I radios. The BP518LF has extended range in class and features 256 channels, making group communication more flexible.



STURDY BODY

Wear-resistant and scratch-resistant body, standard IP54 dustproof and waterproof; large key design, flexible operation even with gloves.



DESIGNED FOR EASE OF USE



CLEAR AND LOUD AUDIO

Light and compact with a built-in intelligent noise reduction algorithm, to eliminate unwanted background noise, supports three-level noise reduction adjustment so even if the other party is speaking in a noisy environment, you can still listen clearly. 3W high-power loudspeaker with a loudness of up to 90dBA, the sound is clear and loud even in noisy and other harsh conditions; good howling suppression ability, even if many people use the walkie-talkie in the same room, there will be no annoying howling sound.



VOICE NOTIFICATION

Voice notification confirms the operation of programmable buttons or changing the channel.



EXPAND COVERAGE

The BP518LF has a high sensitivity receiving module and high-efficiency monopole antenna to enhance signal penetration and achieve better call affect even in weak signal areas. In addition, the monopole antenna has a unique stable design and is not easy to break and bend, it helps to enhance antenna life time and also increase the radiation efficiency compared to traditional antennas by 11% to extend radio communication distance.





TYPE-C CHARGING

Use Type-C charging interface, can be used with a mobile power supply to instantly replenish energy, and put it to work anytime, anywhere.



HIGH ENERGY BATTERY

The BP518LF uses international well-known brand batteries with a long service life. It still has 80% of the initial battery capacity after 500 charge-discharge cycles. The radio can be charged from 0% to 100% in only 1.8 hours. After charging for 1 hour it can work for 10 hours. A 10W rapid-rate charger ensures safe and reliable charging which can work in harsh environments such as high or low temperatures.




DELICATE APPEARANCE

Lightweight design making it lighter and thinner than similar products, easy to carry and use: Two-colour injection moulding making it highly recognisable and able to suit user's working environment and dressing habits.



TRUSTWORTHY QUALITY

Hytera has the world's largest professional communication production line, and manufactures each walkie-talkie in accordance with Industry 4.0 standards. Our strict supplier management system certification ensures each component meets the quality control requirements to ensure the consistency of product quality.

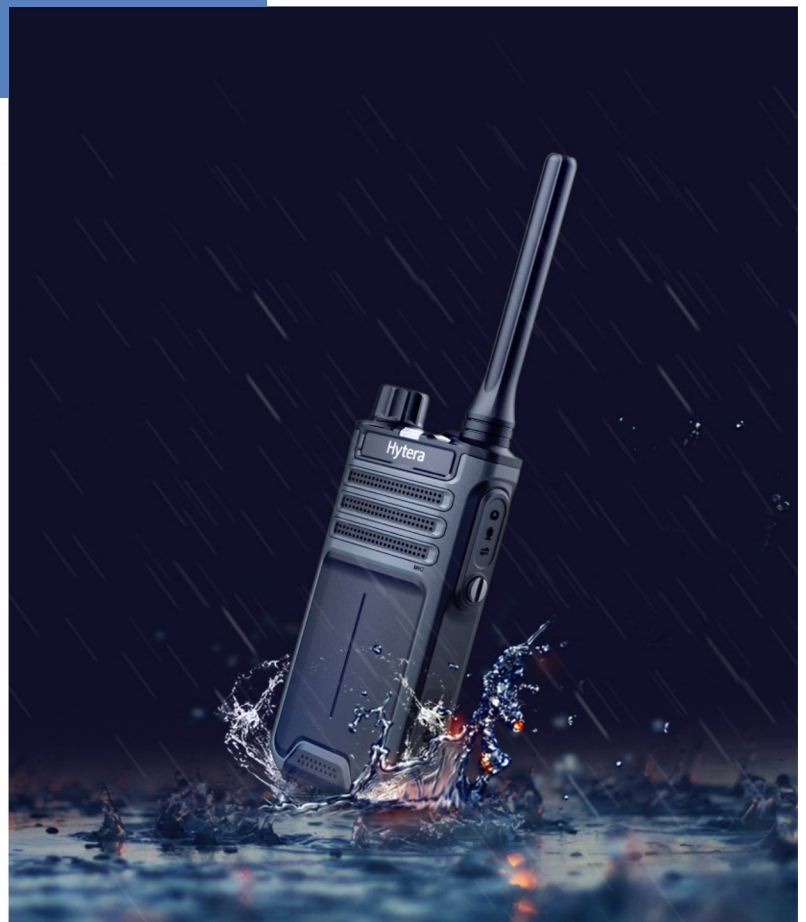

SPECIFICATIONS

General		BP518LF
Frequency Range		446.0 - 446.2 MHz
Channel Capacity		256
Zone Capacity		4
Zone Channel		16
Channel Spacing		12.5kHz
Operating Voltage		7.4V
Battery		1500mAh (Standard); 2200mAh (Optional)
Battery Life (5/5/90 Duty Cycle, High TX Power)		Analog: 17h (1500mAh), 22h (2200mAh) Digital: 18h (1500mAh), 24 (2200mAh)
Frequency Stability		±0.5ppm
Antenna Impedance		50Ω
Dimensions (H x W x D)		115 x 55 x 29.5mm
Weight (with antenna&battery)		210g ± 5%
Receiver		
Sensitivity		Digital: 0.18μV / BER5% Analog 0.18μV (12dB SINAD)
Adjacent Channel Selectivity		TIA-603: 60dB@12.5kHz ETSI: 60dB@12.5kHz
Intermodulation		TIA-603: 70dB@12.5kHz ETSI: 65dB@12.5kHz
Spurious Response Rejection		TIA-603: 70dB@12.5kHz ETSI: 70dB@12.5kHz
Blocking		TIA-603: 80dB ETSI: 84dB
Hum and Noise		40dB@12.5kHz
Rated Audio Power Output		1W
Rated Audio Distortion		≤3%
Audio Response		+1to -3dB
Conducted Spurious Emission		<-57dBm
Transmitter		
RF Power Output		0.5W
FM Modulation		11K0F3E@12.5kHz
4FSK Digital Modulation		12.5kHz Data Only:7K60FXD 12.5kHz Data and Voice: 7K60FXW
Conducted/Radiated Emission		-36dBm < 1GHz; -30dBm > 1GHz
Modulation Limiting		± 2.5kHz@12.kHz
FM Hum and Noise		40dB@12.5kHz
Adjacent Channel Power		60dB@12.5kHz
Audio Response		+1 to -3dB
Audio Distortion		≤3%
Digital Vocoder Type		AMBE+2™
Environmental		
Operating Temperature		-30°C* to +60°C
Storage Temperature		-40°C to +85°C
ESD		IEC 61000-4-2 (Level 4) ±8kV (contact); ±15kV (air)
Dust and Water Intrusion		IEC 60529-IP54
Humidity		MIL-STD-810 G
Shock and Vibration		MIL-STD-810 G

*Radio only - Battery -20°C

ACCESSORIES

STANDARD ACCESSORIES:



Belt Clip



Battery



MUC Rapid-rate
Charger



Power Adapter



Strap

OPTIONAL ACCESSORIES:



Adapter(USB)



Data cable
PC143



C-Earset



Programming cable
PC155



Battery
2200mAh



Hytera Communications Corporation Limited

Stock Code: 002583.SZ

Address: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, P.R.C

Tel: +86-755-2697 2 999 **Fax:** +86-755-8613 7 139 **Post:** 518057

Http: //www.hytera.com marketing@hytera.com



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Communications Corp., Ltd.
©2022 Hytera Communications Corp., Ltd. All Rights Reserved.