



PD50X/PD56X UL913 Intrinsic Safe DMR Radio

- UL Certified DMR radio
- Analog & Digital Dual Modes
- Compact design
- 2 time slots in DMO






Today, safety is the most important thing we pursue in every aspect of life and work. Hytera understands the challenges in hazardous environments and is dedicated to designing and developing safer radios for more and more customers. Hytera believes it is rather urgent to provide an intrinsic safe radio to commercial market. Build a radio with the classic housing to provide a small and light product. Design a radio to pass UL913 certification for most dangerous areas with explosive gas and combustible dusts. Introduce a cost-effective radio with much more features for enterprises and commercial users.

UL913 Certificate

Class III III-Division 1, Group C-G, -30°C to 55°C, T4
 Class I- Division 2, Group A-D

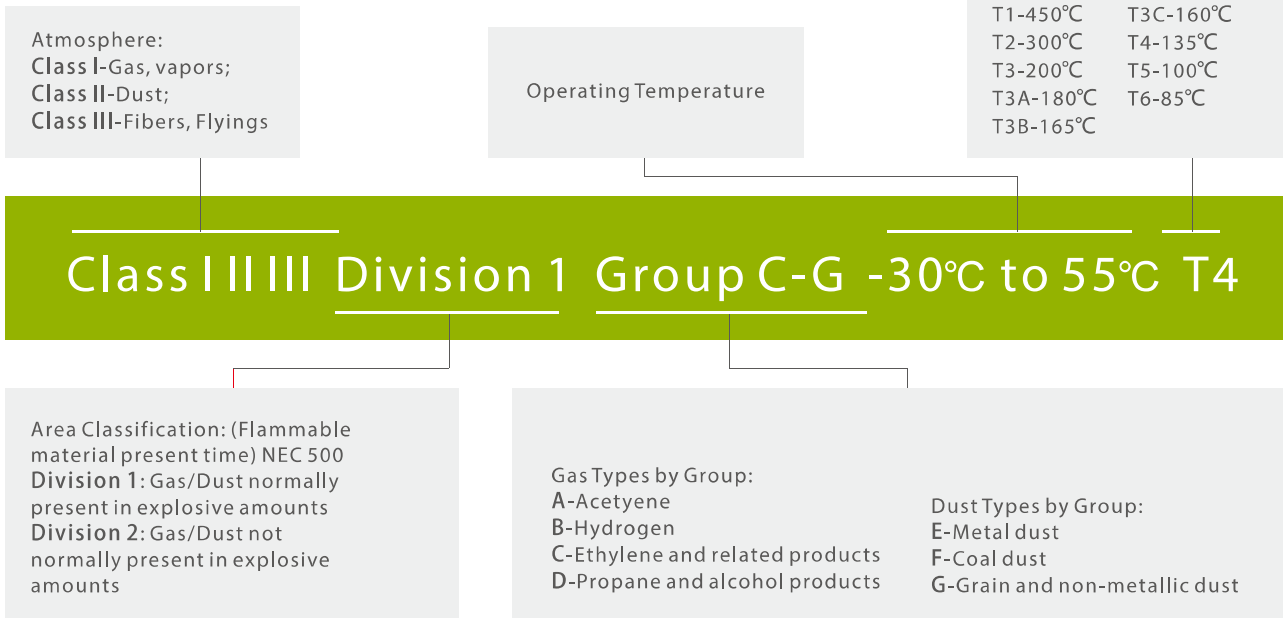

Features

Small, Sleek, Light

The size is 115 X 54 X 35mm (PD50X UL913)/115 X 54 X 37mm (PD56X UL913), dual-color injection, weight is 298g(PD50X UL913)/311g(PD56X UL913).

Long Battery Life

In digital mode, PD5 UL913 Series operate upto 20 hours under a duty cycle of 5-5-90.

Rugged & Reliable

It is compliant with MIL-STD-810 G standards & IP54.

One Touch Call/Text

Support One Touch features that comprise Preprogrammed Text Messages, Voice Calls and Supplementary Features.

Supplementary Features (optional)

PD5 UL913 Series support radio enable, radio disable, and remote monitor, as well as priority interrupt.

Dual Mode (Analog & Digital)

Dual modes (analog & digital) operation ensures a smooth analog to digital migration.

Radio Registration Service

RRS allows PD5 to work in Smart Dispatch and SmartOne Dispatch system, so that the dispatcher can check if the radio is on line or off line.

A&D Mixed Scan

PD5 supports to have analog channel and digital channels added in one scan list. This is more convenient for customers to have a smooth migration from analog radios to digital radios.

Secure Communication

Provide basic digital encryption and Scrambler feature in analog mode.

Advanced Signaling

Support multiple advanced analog signaling modes, including HDC1200, 2-Tone and 5-Tone, providing better integration into existing analog radio fleets.

Emergency Alarm


Emergency Alarm can be sent to other radios via one touch of programmable button, then establish an emergency call in a specific group. Make your response for big event more quickly.

Single-site XPT Trunking (optional)

PD5 UL913 supports working in Hytera XPT Trunking system, which is a cost-effective trunking system and provides dynamic assignment of voice and data service for a large number of subscribers.


Pseudo Trunk

This virtual trunking feature allocates a free timeslot for urgent communications. This effectively enhances frequency efficiency and allows you to communicate in a timely manner in emergency situations.

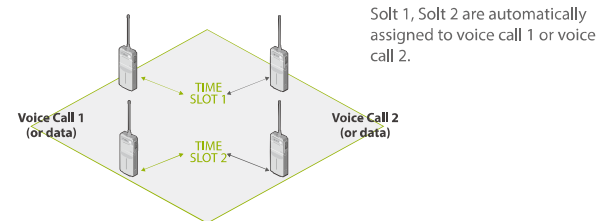

DMO True 2-Slot

In DMO Hytera can provide 2-slot communication, which allows for 2 talk paths on 1 frequency.

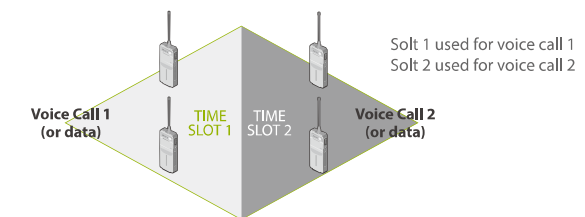

Highlights

- UL Certified DMR radio
- Ergonomic User-Friendly Design
- Light & Durable
- Compact Size & Clear Voice
- Cost-effective

Target Markets



Manufacturing
Some flammable metal, mineral, or other dusts, existing in the factory's air, may give rise to explosion.



Chemical Industry
Flammable substances are converted and processed. These processes may give rise to explosive mixtures.



Food and feedstuffs industry
Explosive dusts may arise during transport and storage of grain, sugar, etc.



Refinery
The hydrocarbons handled in refineries are all flammable and may give rise to explosive atmospheres depending on their flash point.



Pharmaceutical industry
Alcohols are often used as solvents in the production of pharmaceuticals. Agents and auxiliary materials may give rise to dust explosions.



Firefighting
Fire environment often comes with strong smoke, flammable matter and high temperature.

Accessories

Versatile UL certified
Accessories for Specific Tasks



- Adapter PS1026(for non-hazardous area only)
- Strap Ro03
- PC63 Data Cable (USB Port)
- NCN011 Nylon Carrying Case (half-folded) (non-swivel) (black)

Pictures above are for reference only and may vary from actual products.

Specifications

General	
Frequency Range	UHF: 350-400MHz , 400-470MHz ; VHF: 136-174MHz
Channel Capacity	256(PD50X)/512 (PD56X)
Zone Capacity	16 (PD50X)/32 (PD56X)
Channel Spacing	25/20/12.5KHz
Operating Voltage	7.4V
Battery	2000mAh (Li-Ion)
Battery Life (5/5/90)	Analog/Digital: about 15.3 Hours/20 Hours
Weight	298g(PD50X UL913)/311g(PD56X UL913)
Dimensions	115 X 54 X 35mm (PD50X UL913) 115 X 54 X 37mm (PD56X UL913)
Frequency Stability	±0.5ppm
Antenna Impedance	50Ω
Receiver	
Sensitivity (Digital)	0.22μV / BER 5%
Sensitivity (Analog)	0.22μV (Typical) (12dB SIN AD) 0.4μV (20dB SIN AD) 0.22μV (12dB SIN AD)
Adjacent Selectivity	TIA-603 60dB @ 12.5KHz/70dB @ 20 & 25KHz
	ETSI 60dB @ 12.5KHz/70dB @ 20 & 25KHz
Spurious Response Rejection	TIA-603 70dB @ 12.5/20/25KHz
	ETSI 70dB @ 12.5/20/25KHz
Inter-modulation	TIA-603 70dB @ 12.5/20/25KHz
	ETSI 65dB @ 12.5/20/25KHz
Hum & Noise	40dB @ 12.5KHz 43dB @ 20KHz 45dB @ 25KHz
Rated Audio Power Output	0.5W
Rated Audio Distortion	≤3%
Audio Response	+1 ~ -3dB
Conducted Spurious Emission	<-57dBm

Transmitter	
RF Power Output	VHF High power: 5W VHF Low power: 1W UHF High power: 4W UHF Low power: 1W
FM Modulation	11K0F3E @ 12.5KHz 14K0F3E @ 20KHz 16K0F3E @ 25KHz
4FSK Digital Modulation	12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW
Conducted/Radiated Emission	-36dBm <1GHz, -30dBm >1GHz
Modulation Limiting	±2.5KHz @ 12.5KHz ±4.0KHz @ 20KHz ±5.0KHz @ 25KHz
FM Hum & Noise	40dB @ 12.5KHz 43dB @ 20KHz 45dB @ 25KHz
Adjacent Channel Power	60dB @ 12.5KHz, 70dB @ 20/25KHz
Audio Response	+1 ~ -3dB
Audio Distortion	≤3%
Digital Vocoder Type	AMBE++ or SELP
Digital Protocol	ETSI-TS102 361-1,-2,-3

Environmental	
Operating Temperature	-30°C~ +60°C
Storage Temperature	-40°C~ +85°C
ESD	IEC 61000-4-2 (Level 4) ±8kV (Contact) ±15kV (Air)
Dustproof & Waterproof	IP54 Standard
Humidity	Per MIL-STD-810 G Standard
Shock & Vibration	Per MIL-STD-810 G Standard

PD50X/PD56X UL913, X=0, 2, 5, 6 or 8, model number varies geographically. For details, please contact our regional sales representatives.

All specifications are subject to change without notice due to continuous development.



Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, Beihuan Rd.,
Nanshan District, Shenzhen, China

Tel: +86-755-2697 2999 **Fax:** +86-755-8613 7139 **Post:** 518057

Http: //www.hytera.com **Stock Code:** 002583.SZ

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Communications Co., Ltd.
© 2013 Hytera Communications Co., Ltd. All Rights Reserved.